

6

5

4


3

2

1

APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/13/06	
A		PART REVISION	4/19/06	
B		ADDED DIM.	8/11/09	
C		UPDATE DRAWING	4/13/18	AY/MY

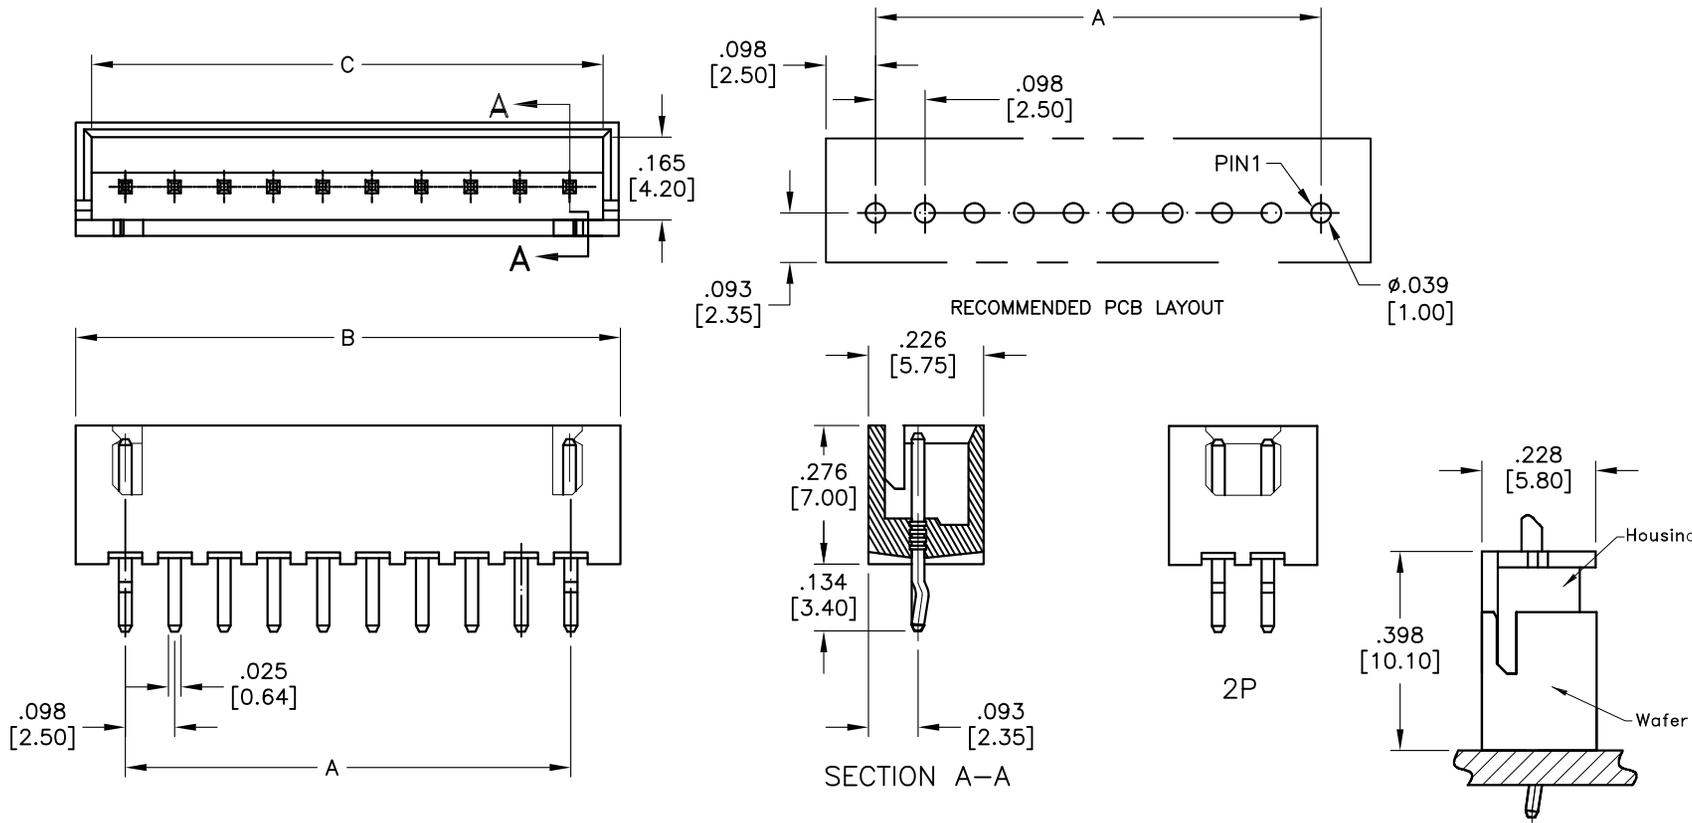

SPECIFICATIONS:

Material:
 Insulator: Nylon 66, rated UL 94V-0
 Insulator color: Natural
 Contact: Brass
 Plating:
 Tin over Nickel underplate overall
 Electrical:
 Rated Voltage: 250V AC/DC
 Rated Current: 3A AC/DC
 Contact Resistance: 20 mohms max.
 Insulation resistance: 1,000 Mohms min.
 Withstand voltage: 1000V AC for 1 minute.
 Temperature Rating:
 -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant



Positions: 2 thru 20
 A = .098 [2.50] x No. of Spaces
 B = .098 [2.50] x No. of Spaces + .197 [5.00]
 C = .098 [2.50] x No. of Spaces + .138 [3.50]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	∅.X	± .10
.XX	± .020	∅.XX	± .015
.XXX	± .015	∅.XXX	± .010

ADAM TECH INTERCONNECTS
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	LFJ	4/13/06
CHECKED		
APPROVED		

TITLE WIRE TO BOARD PITCH: 2.5MM WAFER STRAIGHT TYPE W/ KINK		
SIZE X	PART NO. 25SH-B-XX-TS	REV. C
REF: S00124T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1