

# FQA16N25C

## 250V N-Channel MOSFET


### **General Description**


These N-Channel enhancement mode power field effect transistors are produced using Fairchild's proprietary, planar stripe, DMOS technology.

This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency switching DC/DC converters, switch mode power supplies, DC-AC converters for uninterrupted power supplies and motor controls.

#### **Features**

- 17.8A, 250V,  $R_{DS(on)}$  = 0.27 $\Omega$  @V<sub>GS</sub> = 10 V Low gate charge ( typical 41 nC)
- Low Crss (typical 68 pF)
- · Fast switching
- · 100% avalanche tested
- · Improved dv/dt capability





## Absolute Maximum Ratings T<sub>C</sub> = 25°C unless otherwise noted

Symbol	Parameter		FQA16N25C	Units
$V_{DSS}$	Drain-Source Voltage		250	V
I <sub>D</sub>	Drain Current - Continuous (T <sub>C</sub> = 25°	(C)	17.8	Α
	- Continuous (T <sub>C</sub> = 100°C)		11.3	Α
I <sub>DM</sub>	Drain Current - Pulsed	(Note 1)	71.2	Α
V <sub>GSS</sub>	Gate-Source Voltage		± 30	V
E <sub>AS</sub>	Single Pulsed Avalanche Energy	(Note 2)	410	mJ
I <sub>AR</sub>	Avalanche Current	(Note 1)	17.8	А
E <sub>AR</sub>	Repetitive Avalanche Energy	(Note 1)	18.0	mJ
dv/dt	Peak Diode Recovery dv/dt	(Note 3)	5.5	V/ns
$P_{D}$	Power Dissipation (T <sub>C</sub> = 25°C)		180	W
	- Derate above 25°C		1.45	W/°C
T <sub>J</sub> , T <sub>STG</sub>	Operating and Storage Temperature Range		-55 to +150	°C
T <sub>L</sub>	Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds		300	°C

## **Thermal Characteristics**

Symbol	Parameter	Тур	Max	Units
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case		0.69	°C/W
$R_{\theta CS}$	Thermal Resistance, Case-to-Sink Typ.	0.24		°C/W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient		40	°C/W

Symbol	Parameter	Test Conditions	Min	Тур	Max	Units
Off Cha	aracteristics					
BV <sub>DSS</sub>	Drain-Source Breakdown Voltage	$V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$	250			V
ΔBV <sub>DSS</sub> / ΔΤ <sub>J</sub>	Breakdown Voltage Temperature Coefficient	$I_D$ = 250 μA, Referenced to 25°C		0.31		V/°C
I <sub>DSS</sub>		V <sub>DS</sub> = 250 V, V <sub>GS</sub> = 0 V			10	μΑ
	Zero Gate Voltage Drain Current	V <sub>DS</sub> = 200 V, T <sub>C</sub> = 125°C			100	μΑ
I <sub>GSSF</sub>	Gate-Body Leakage Current, Forward	V <sub>GS</sub> = 30 V, V <sub>DS</sub> = 0 V			100	nA
I <sub>GSSR</sub>	Gate-Body Leakage Current, Reverse	V <sub>GS</sub> = -30 V, V <sub>DS</sub> = 0 V			-100	nA
On Cha	racteristics					
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250 μA	2.0		4.0	V
R <sub>DS(on)</sub>	Static Drain-Source On-Resistance	V <sub>GS</sub> = 10 V, I <sub>D</sub> = 8.9 A		0.22	0.27	Ω
9 <sub>FS</sub>	Forward Transconductance	V <sub>DS</sub> = 40 V, I <sub>D</sub> = 8.9 A (Note 4)		10.5		S
Dynamic Characteristics $C_{iss}$ Input Capacitance $V_{DS} = 25 \text{ V}, V_{GS} = 0 \text{ V},$				830	1080	pF
C <sub>oss</sub>	Output Capacitance	f = 1.0 MHz		170	220	pF
C <sub>rss</sub>	Reverse Transfer Capacitance	1 - 1.0 Wil 12		68	89	pF
	ing Characteristics					
t <sub>d(on)</sub>	Turn On Dolay Timo			15	40	ns
t <sub>r</sub>	Turn-On Rise Time	$V_{DD} = 125 \text{ V}, I_{D} = 15.6 \text{ A},$		130	270	ns
t <sub>d(off)</sub>	Turn-Off Delay Time	$R_G = 25 \Omega$		135	280	ns
t <sub>f</sub>	Turn-Off Fall Time	(Note 4, 5)		105	220	ns
Q <sub>g</sub>	Total Gate Charge	V <sub>DS</sub> = 200 V, I <sub>D</sub> = 15.6 A,		41	53.5	nC
Q <sub>gs</sub>	Gate-Source Charge	V <sub>GS</sub> = 10 V		5.6		nC
Q <sub>gd</sub>	Gate-Drain Charge	(Note 4, 5)		22.7		nC
					1	1
Drain-S	Source Diode Characteristics at				17.8	Α
I <sub>SM</sub>	Maximum Continuous Drain-Source Diode Forward Current  Maximum Pulsed Drain-Source Diode Forward Current				71.2	A
V <sub>SD</sub>	Drain-Source Diode Forward Voltage	V <sub>GS</sub> = 0 V, I <sub>S</sub> = 17.8 A			1.5	V
t <sub>rr</sub>	Reverse Recovery Time	$V_{GS} = 0 \text{ V}, I_S = 17.6 \text{ A}$		260	1.5	ns
	,	$dI_F / dt = 100 \text{ A/}\mu\text{s}$ (Note 4)				μС
Q <sub>rr</sub>	Reverse Recovery Charge	$u_F / u_i = 100 \text{ A/}\mu\text{S}$ (Note 4)		2.47		

- **Notes:**1. Repetitive Rating : Pulse width limited by maximum junction temperature 2. L = 2.7mH, I $_{AS}$  = 15.6A, V $_{DD}$  = 50V, R $_{G}$  = 25  $\Omega$ , Starting T $_{J}$  = 25°C 3. I $_{SD}$  ≤ 17.8A, di/dt ≤ 300A/ $\mu$ s, V $_{DD}$  ≤ BV $_{DSS}$ , Starting T $_{J}$  = 25°C 4. Pulse Test : Pulse width ≤ 300 $\mu$ s, Duty cycle ≤ 2% 5. Essentially independent of operating temperature

# **Typical Characteristics**




Figure 1. On-Region Characteristics




Figure 2. Transfer Characteristics




Figure 3. On-Resistance Variation vs Drain Current and Gate Voltage




Figure 4. Body Diode Forward Voltage Variation with Source Current and Temperature




Figure 5. Capacitance Characteristics





Figure 6. Gate Charge Characteristics

©2004 Fairchild Semiconductor Corporation


# Typical Characteristics (Continued)



30 25 (Normalized) 20 (Normalized) 30 (Normali

Figure 7. Breakdown Voltage Variation vs Temperature








Figure 9. Maximum Safe Operating Area

Figure 10. Maximum Drain Current vs Case Temperature


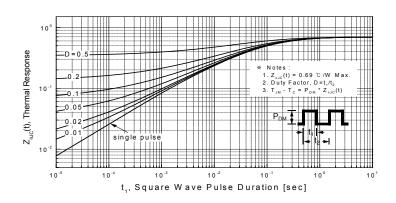



Figure 11. Transient Thermal Response Curve

©2004 Fairchild Semiconductor Corporation Rev. A, March 2004


## **Gate Charge Test Circuit & Waveform**

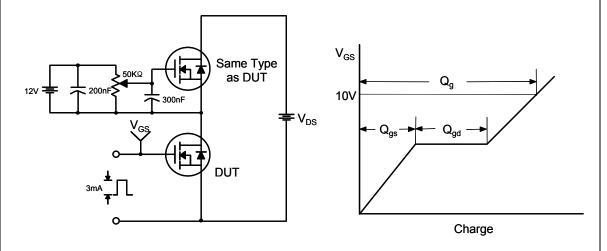


## **Resistive Switching Test Circuit & Waveforms**

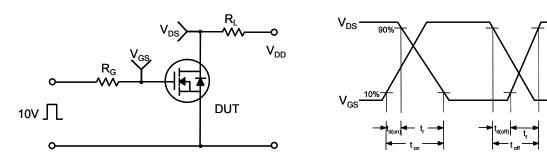



## **Unclamped Inductive Switching Test Circuit & Waveforms**

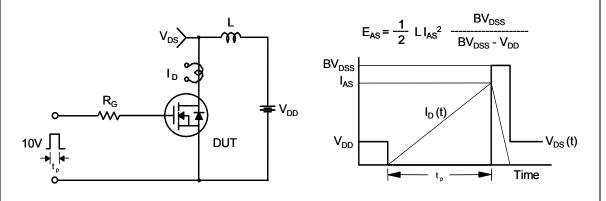


## Peak Diode Recovery dv/dt Test Circuit & Waveforms

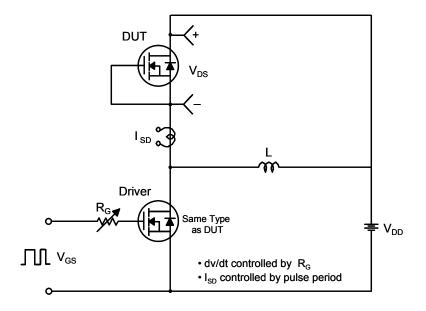






Body Diode Reverse Current

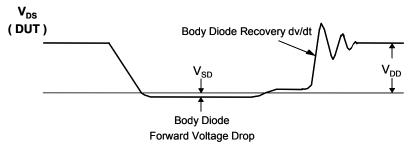

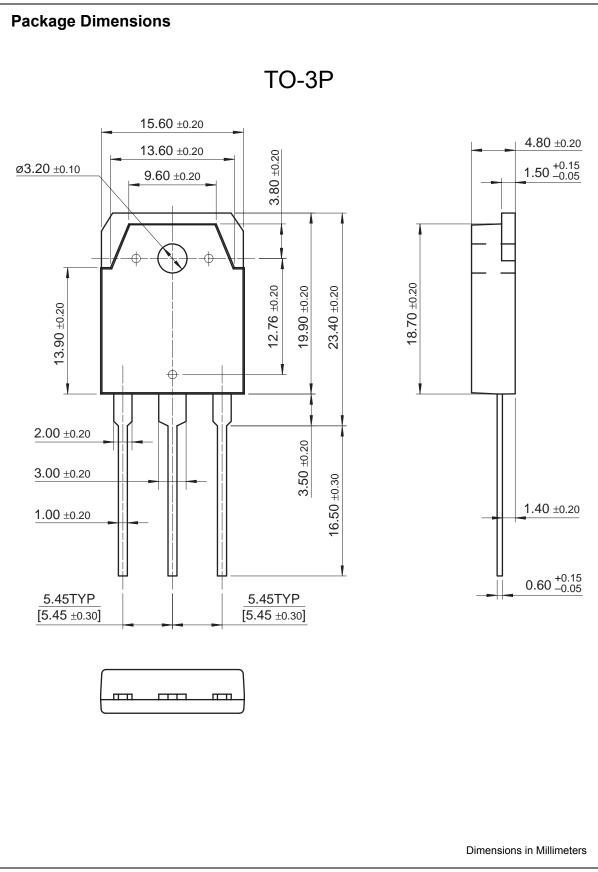

#### **TRADEMARKS**

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FACT Quiet series™	ISOPLANAR™	POP™	Stealth™
ActiveArray™	FAST <sup>®</sup>	LittleFET™	Power247™	SuperFET™
Bottomless™	FASTr™	MICROCOUPLER™	PowerSaver™	SuperSOT™-3
CoolFET™	FPS™	MicroFET™	PowerTrench <sup>®</sup>	SuperSOT™-6
$CROSSVOLT^{\text{TM}}$	FRFET™	MicroPak™	QFET™	SuperSOT™-8
DOME™	GlobalOptoisolator™	MICROWIRE™	QS™	SyncFET™
EcoSPARK™	GTO™	MSX™	QT Optoelectronics™	TinyLogic <sup>®</sup>
E <sup>2</sup> CMOS™	HiSeC™	MSXPro™	Quiet Series™	TINYOPTO™
EnSigna™	I <sup>2</sup> C <sup>TM</sup>	OCX™	RapidConfigure™	TruTranslation™
FACT™	ImpliedDisconnect™	OCXPro™	RapidConnect™	UHC™
Across the board. Around the world.™		OPTOLOGIC <sup>®</sup>	SILENT SWITCHER®	UltraFET <sup>®</sup>
The Power Franchise™		OPTOPLANAR™	SMART START™	VCX™
Programmable Active Droop™		PACMAN™	SPM™	

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### **LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### PRODUCT STATUS DEFINITIONS

#### **Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

©2004 Fairchild Semiconductor Corporation Rev. 18