


3S-Series

Miniature Pushbutton Switches

PRODUCT WEBPAGE

request sample, configure part



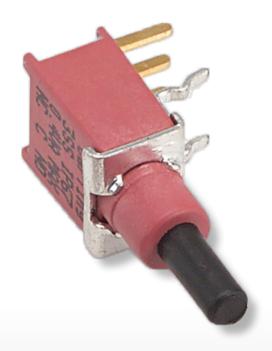

The 3S family of sub-miniature pushbutton switches is composed of three switch series; the 3S1-Series subminiature pushbutton switch, the 3SS-Series sealed sub-miniature pushbutton switch, and the 3SM-Series surface mount sealed sub-miniature pushbutton switch. All switches are available with a variety of rating, termination and actuator choices, and will withstand temperatures from -30°C to +85°C.

Poles

.4-6 Amps

125, 250

VDC

Typical Applications

- Instrumentation
- Networking
- · Performance Audio
- Computers
- · Low Power On/Off Designs





Telecommunications

Tech Specs



3SS-Series Sealed Sub-Miniature **Pushbutton Switch**



3S1-Series Sub-Miniature Pushbutton Switch



3SM-Series **Sealed Surface Mount** Sub-Miniature **Pushbutton Switch**

Electrical

Contact Rating	refer to ordering scheme
Electrical Life	50,000 make & break cycles @ full load
Contact Resistance	20 mΩ max. initial @ 2-4 VDC 100mA for both silver & gold plated contacts
Insulation Resistance	1000 MΩ min.
Dielectric Strength	1500 Volts RMS @ sea level

Physical

Operating Temperature	-30°C to +85°C
Index of Protection	3SS & 3SM-Series: IP67
Solder Heat Resistance	MIL-STD-202, Method 210

Material

Case	all UL94 V-0 3SI-Series: Dially phthalate (DAP) 3SS-Series: Glass filled nylon 6/6,flame retardant, heat stabilized 3SM-Series: Glass filled nylon 4/6,flame retardant, heat stabilized		
Plunger	3SI-Series:Thermoplastic polyester, black 3SS-Series: Thermoplastic polyester (UL 94V-0), with internal o-ring 3SM-Series: Glass filled nylon 4/6,flame retardant, heat stabilized		
Bushing	3S1-Series: Brass, nickel plated 3SS-Series: Glass filled nylon 6/6,flame retardant, heat stabilized (UL 94V-0) 3SM-Series: Glass filled nylon 4/6,flame retardant, heat stabilized (UL 94V-0)		
Housing	Stainless Steel		
Switch Support	Brass, tin plated		
Terminal Seal	Ероху		

Ordering Scheme

Sample Part Number	3SS	_	WSP	9	_	M6	R	Ε
Selection	1		2	3		4	5	6

1. SERIES

Sealed Sub-Miniature Pushbutton Switch

2. POLES

Single pole - uses terminals 1, 2 & 3 Double pole - uses terminals 1, 2, 3, 4, 5 & 6 WDP

3. CIRCUIT

() - momentary **Switching Position: 1** 2-1, 5-4 (ON) (ON) 2-3, 5-6 ON OFF Note: Plunger at rest in Position 1. Plunger depressed in Position 2.

4. ACTUATOR STYLE 4

М2 M6 PC Mount, 90° horizontal M61 Snap-In, 90° horizontal M7 PC Mount, 90° vertical Snap-In, 90° vertical PC Mount, U bracket VS21 Snap-In, Ú bracket

5. CONTACTS / TERMINALS

Со	ntact Material	Terminal Plating	g Rating Approve	ıls
G	silver ¹	gold over silver	1A 125VAC or 28VDC	IP67
Κ	gold ²	tin ^{3,4}	0.4VA max 20V max (AC/DC)	IP67
Р	silver ¹	tin ^{3,4}	1A 125VAC or 28VDC	IP67
R	gold ²	gold ²	0.4VA max 20V max (AC/DC)	IP67

8. EPOXY SEAL

Epoxy Seal 0 without Epoxy Seal

es.

Movable contact & terminal platings: silver over copper alloy
Movable contact & terminal platings: gold over nickel over copper alloy
Terminal platings: tin over nickel over copper alloy
Tin option available with PC terminations only.

Browse Standard Parts >

Ordering Schemes

Part Number Selection

1. SERIES

Sub-Miniature Pushbutton Switch

2. POLES

Single pole - uses terminals 1, 2 & 3

3. CIRCUIT

() - momentary **Switching Position:** 2-3, 5-6 ON (ON) OFF (ON) Note: Plunger at rest in Position 1. Plunger depressed in Position 2.

4. ACTUATOR STYLE

Flush Bushing B5 1 10-48 Threaded В9 **B6** Unthreaded "D" RΩ 1/4" Unthreaded "D" 0P1 Unthreaded Snap-In with bezel 1/4-40 Threaded "D" PΟ Flush Plunger

🛭 Configure Complete Part Number 🗲

Browse Standard Parts >

5. TERMINATION

Solder Lug M6 PC Mount, 90° horizontal PC Mount, 90° vertical VS2 PC Mount, U bracket M61 Snap-In, 90° horizontal PCB M71 Snap-In, 90° vertical VS21 Snap-In, U bracket

6. CONTACTS / TERMINALS

Contact Material		Terminal Plating	Rating
G	silver ³	gold over silver	1A@125VAC or 28VDC
	gold ^{4,7}	tin ⁶	0.4VA max @ 20V max (AC/DC)
	silver ^{3,8}	tin ⁶	1A@125VAC or 28VDC
	silver ³	silver_3	1A@125VAC or 28VDC
R	gold ⁴	gold ⁵	0.4VA max @ 20V max (AC/DC)

7. EPOXY SEAL

Epoxy Seal without Epoxy Seal

- es:
 Hardware includes (2) 2MI-HDW21 nuts, and (1) 2MI-HDW22 washer
 Hardware includes (2) 2MI-HDW2 nuts, (1) 2MI-HDW11 washer,
 and (1) 2MI-HDW16 locking ring
 Movable contact and terminal platings: silver over copper alloy
 Movable contact and terminal platings: gold over nickel over copper alloy
 Terminal platings: gold over nickel over copper alloy
 Terminal platings: tin over copper alloy
 Terminal contact platings: Gold over nickel alloy
 Terminal contact platings: silver over nickel alloy

Sample Part Number	3S1	_	SP	9	- <u>B6</u> -	- M7	- F	<u>E</u>
Selection	1		2	3	4	5	6	7

1. SERIES

3MS Sealed Snap-Action Miniature Pushbutton Switch

2. POLES

Single pole - uses terminals 1, 2 & 3

3. CIRCUIT

() - momentary Switching Position: 2-3, 5-6 ON (ON) Note: Plunger at rest in Position 1. Plunger depressed in Position 2.

4. TERMINATION

Surface Mount, horizontal .433 [11.00 mm] Surface Mount, 90° flat .286 [7.26 mm] Surface Mount, 90° right angle Surface Mount, 90° horizontal .353 [8.97 mm] М7

5. CONTACTS/TERMINALS

Conto	act Material	Terminal Plating	Rating	Approv	/als
G	silver 1_	gold over silver	1A 125VAC or 28VDC		IP67
K	gold ^{2,5}	tin ⁴	0.4VA max 20V max (AC)	/DC)	IP67
P	silver ^{1,6}	tin ⁴	1A 125VAC or 28VDC		IP67
Q	silver 1	silver 1	1A 125VAC or 28VDC		IP67
R	gold ²	gold ³	0.4VA max 20V max (AC)	DC)	IP67

6. EPOXY SEAL

Epoxy Seal 0 without Epoxy Seal

7. PACKAGING

T/R tape reel - 500 pieces per reel Switches are bulk packed, unless T/R is specified at the end of the part number.

Notes

- as:

 Movable contact and terminals platings: silver over copper alloy

 Movable contact platings: gold over nickel over copper alloy

 Terminal platings: gold over nickel over copper alloy

 Terminals platings: tin over copper alloy

 Terminal contact platings: gold over nickel alloy

 Terminal contact platings: silver over nickel alloy

🛭 Configure Complete Part Number > 💮 🕾 Browse Standard Parts >

3S-Series Accessories

To order accessories assembled on a switch, specify the switch number followed by the accessory part number and the word "assembled". Ex: 3S1-SP9-B6-M7-RE-C23 ASSEMBLED. To order accessories in bulk, specify the Series, followed by the accessory. Ex: 3S1-C13.

Sample **Optional Cap** Selection

1. SERIES


Fits 3SS, 3SI or 3MS


2. TOGGLE CAP SIZE


C1 .158" [4.01 mm] height .138" [35.05 mm] height


White Yellow Black Green Red

inches [millimeters]

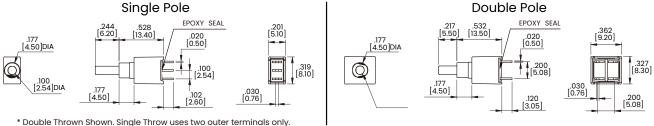


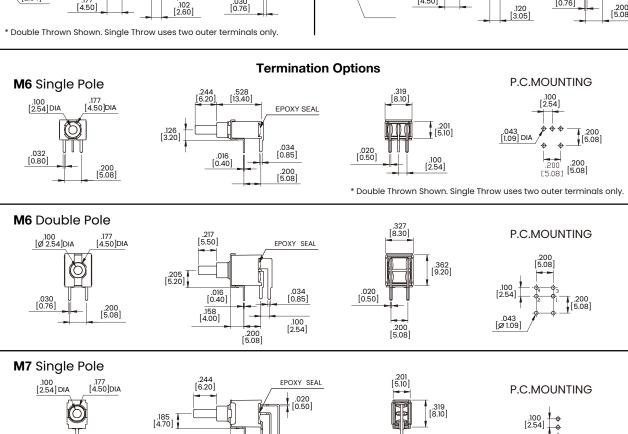


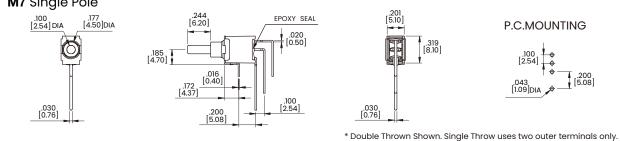

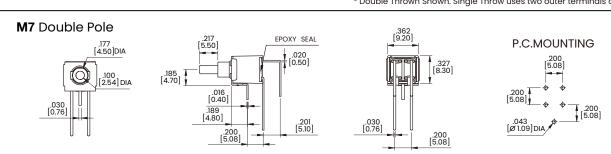


inches [millimeters]

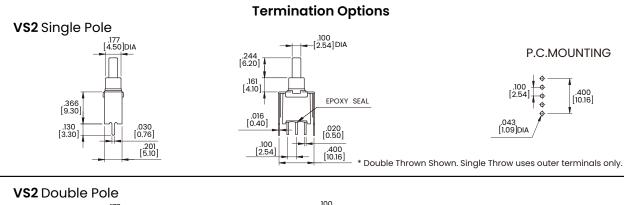

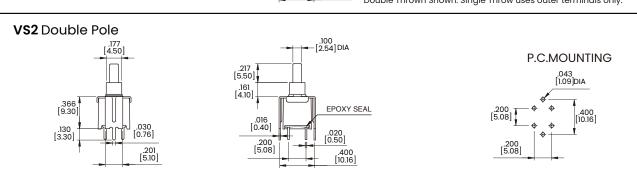


 $^{^{\}ast}$ PC Mounting for M61, M71, VS21 refer to M6, M7, VS2 respectively.


inches [millimeters]

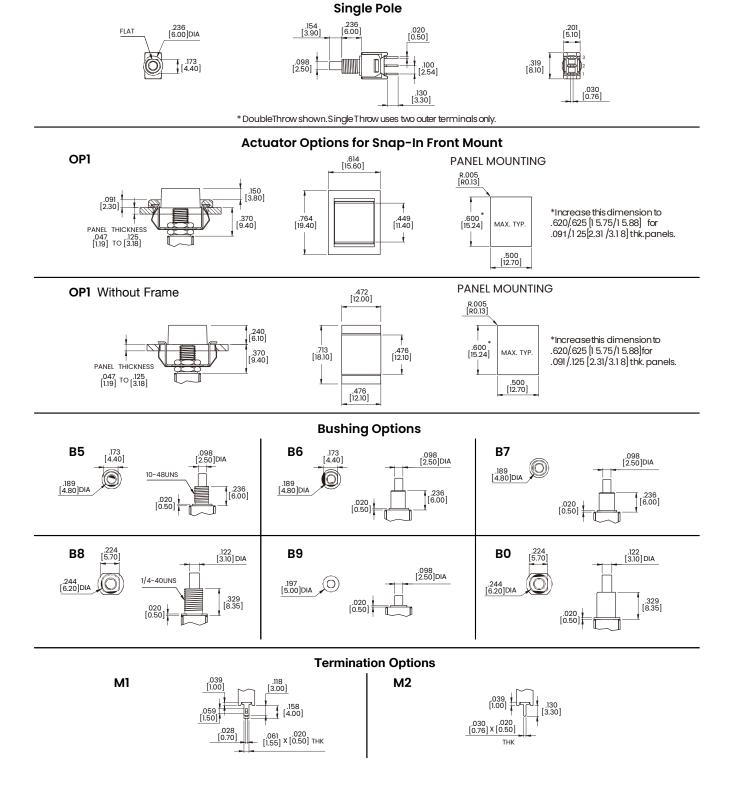


inches [millimeters]




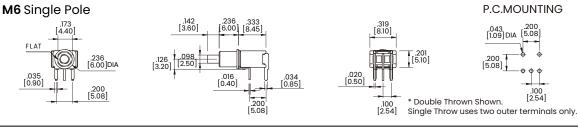

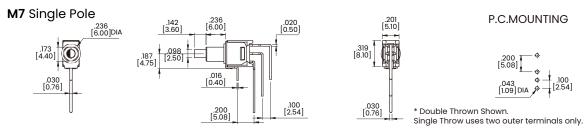

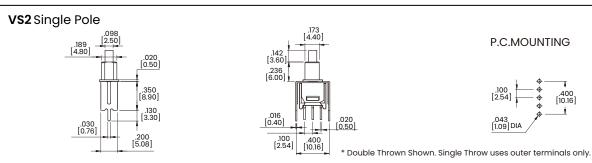



Snap-In Termination Options M71

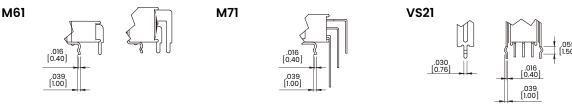


^{*} PC Mounting for M61, M71, VS21 refer to M6, M7, VS2 respectively.

inches [millimeters]

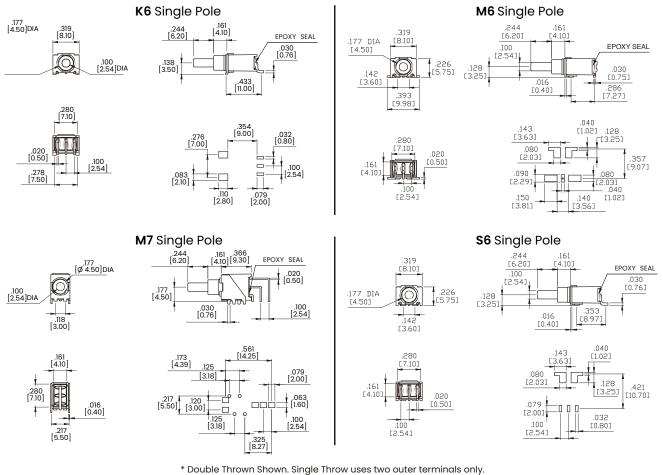



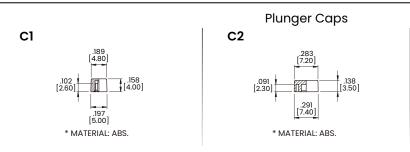

CAP COLORS						
1	White	6	Green			
2	Black	7	Blue			
3	Red	8	Brown			
4	Orange	9	Gray			
5	Yellow					

Authorized Sales Representatives and Distributors

Click on a region of the map below to find your local representatives and distributors or visit www.carlingtech.com/findarep.



About Carling

Founded in 1920, Carling Technologies is a leading manufacturer of electrical and electronic switches and assemblies, circuit breakers, electronic controls, power distribution units, and multiplexed power distribution systems. With six ISO9001 and IATF16949 registered manufacturing facilities and technical sales offices worldwide, Carling Technologies Sales, Service and Engineering teams do much more than manufacture electrical components, they engineer powerful solutions! To learn more about Carling please visit www.carlingtech.com/company-profile.

To view all of Carling's environmental, quality, health & safety certifications please visit www.carlingtech.com/environmental-certifications.